


PUTTING A GUARD ON PENETRATION HAZARDS





PROTECTS AGAINST FALLS THROUGH UNGUARDED PENETRATIONS AND GROUND OPENINGS IN CIVIL WORKS APPLICATIONS.


A BETTER WAY TO SAFEGUARD YOUR WORKERS

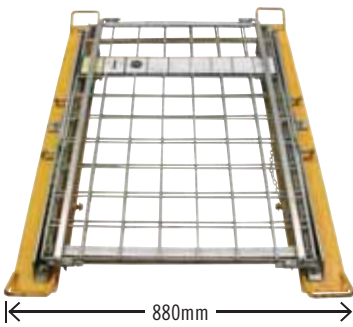

7903250 | PenoGuard™ Civil

PenoGuard™ eliminates the commonly used hazardous industry practice of utilising pieces of plywood or makeshift guardrails to prevent workers from falling through access holes in civil works applications.

A 2-in-1 lockable safety device that is easily secured to the access hole with integral side locking screws, PenoGuard™ improves site safety around civil works openings by solving the elements of penetration awareness and fall protection.

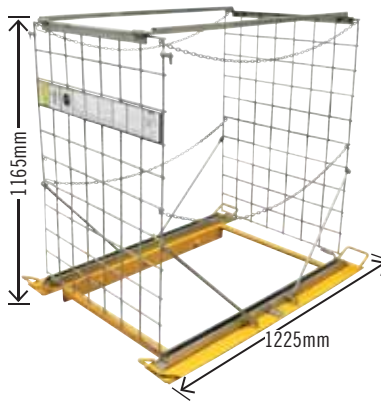

The "skid" design allows for permanent attachment when performing extended works programs. It can also be locked to prevent unauthorised entry during periods when workers are absent from the work site - Ideal for overnight security.

When in the closed position workers are fully protected and alerted to the presence of a penetration, eliminating any risk of falling through. When in the open position a four sided high viz guard rail allows easy access to the penetration while protecting workers and or passersby around the hole.

For full product specifications refer to our PenoGuard™ Specification sheet.

Contact Capital Safety for more information on DBI-SALA's range of PenoGuard™ Fall Protection Systems available for Confined Space, Civil and Construction applications, or visit www.penoguard.capitalsafety.com.au. Alternatively scan the QR Code to the right with your smart phones QR scanner/reader. QR readers are available for free from your mobiles app store.



LIGHTWEIGHT & PORTABLE
PenoGuard™ is light weight and portable, making it ideal to transport from job to job. The system provides an effective and economical solution for the prevention of falls around penetrations.



EASY ASSEMBLY
Once secured over the penetration PenoGuard™ assembles to a four sided guard rail in less than a minute with four simple steps. Disassembly, or 'Lock Down', is just as simple.



BUILT TO LAST
Constructed from high strength steel, PenoGuard™ has a load rating of 200kg in the closed position and 150kg when used as a four sided guard rail, ensuring the ultimate in safety, security and durability on any job site.



Capital Safety - Australia & New Zealand
Australia: 1800 245 002 | New Zealand: 0800 212 505
www.capitalsafety.com.au
sales@capitalsafety.com.au

- Asia: +65 6558 7758
- Latin America: +1 651 385 4301
- USA: 800.328.6146
- Northern Europe: +44 (0) 1928 571234
- Canada: 800 387 7484
- Germany: +49 2634 8052
- Europe, Middle East, Africa: +33 (0)4 97 10 00 10

